

RECESSED ALUMINUM DOOR - CT

FOR SUSPENDED CEILINGS


Milcor CT recessed aluminum ceiling access doors, designed for uses in suspended tile ceilings, provide convenient access to services or controls located in ceilings. Units are installed by bolting the hanger brackets to hanger rods furnished and installed by the contractor. The cover is recessed to accept $\frac{3}{4}$ " ceiling tile, with the frame flange serving as a support ledge for the tile.

Specifications

- **Material:** $\frac{1}{4}$ " extruded aluminum frame and $\frac{1}{8}$ " aluminum plate door panel
- **Finishes:** Mill Finish Aluminum
- **Hinge:** Stainless Steel Continuous Hinge
- **Lock:** For downward swing model only, covers have an automatic snap latch with removable outside handle.



Installation Details

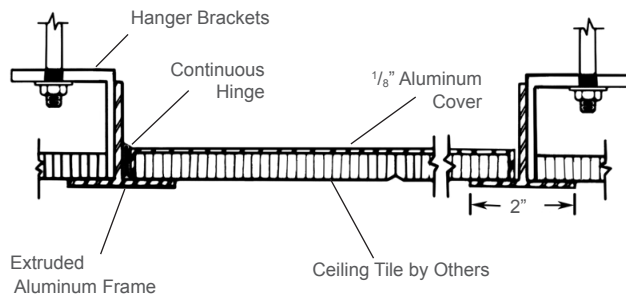

Upward Swing

Leaf Type	Style	Dimensions (Center-to-center of angles or tees)	Model No.	Shipping Wt. Lbs.
Single	CT-1 US	2'6" x 2'6"	3520-101-9	35
Single	CT-2 US	2'6" x 3'0"	3520-104-9	40
Double	CT-3 US	2'6" x 2'6"	3520-107-9	45

Downward Swing

Leaf Type	Style	Dimensions (Center-to-center of angles or tees)	Model No.	Shipping Wt. Lbs.
Single	CT-1 DS	2'6" x 2'6"	3520-317-9	35
Single	CT-2 DS	2'6" x 3'0"	3520-320-9	40
Double	CT-3 DS	2'6" x 2'6"	3520-325-9	45