

STANDARD RETROFIT SAFETY RAILING COMPATIBILITY:
 (NOMINAL HATCH WIDTH X LENGTH)
 34" X 34" - MINIMUM
 58" X 52" - MAXIMUM
 SPECIALS FOR NOMIAL HATCHES LARGER THAN 4'0"X4'6"
 RAIL HEIGHT MEETS 42" REQUIREMENT
 DISPLAYED DIMENSIONS ARE OUTSIDE DIMENSIONS OF CURB, NOT NOMINAL.
 SAFETY RAIL TO BE ATTACHED SO THAT GATE EXITS OPPOSITE THE HINGED SIDE OF THE ROOF HATCH.

- FEATURES:**
1. SELF CLOSING HINGES
 2. POWDER COATED SAFETY YELLOW
 3. SLOTTED CORNER BRACKET HOLES FOR UNIVERSAL COMPATABILITY AND EASE OF INSTALLATION
 4. RAIL AND GATE TELESCOPE TO ACCOMODATE MULTIPLE HATCH SIZES.



ORDER WILL NOT BE RELEASED FOR FABRICATION UNTIL SIGNED COPY IS RECEIVED.

VERIFICATION AND APPROVAL OF GENERAL ARRANGEMENT AND OVERALL DIMENSIONS FOR THIS DOCUMENT ARE REQUIRED BEFORE THE ORDER IS ENTERED FOR MANUFACTURING.

APPROVAL SIGNATURE _____

TITLE HELD _____

DATE OF APPROVAL _____

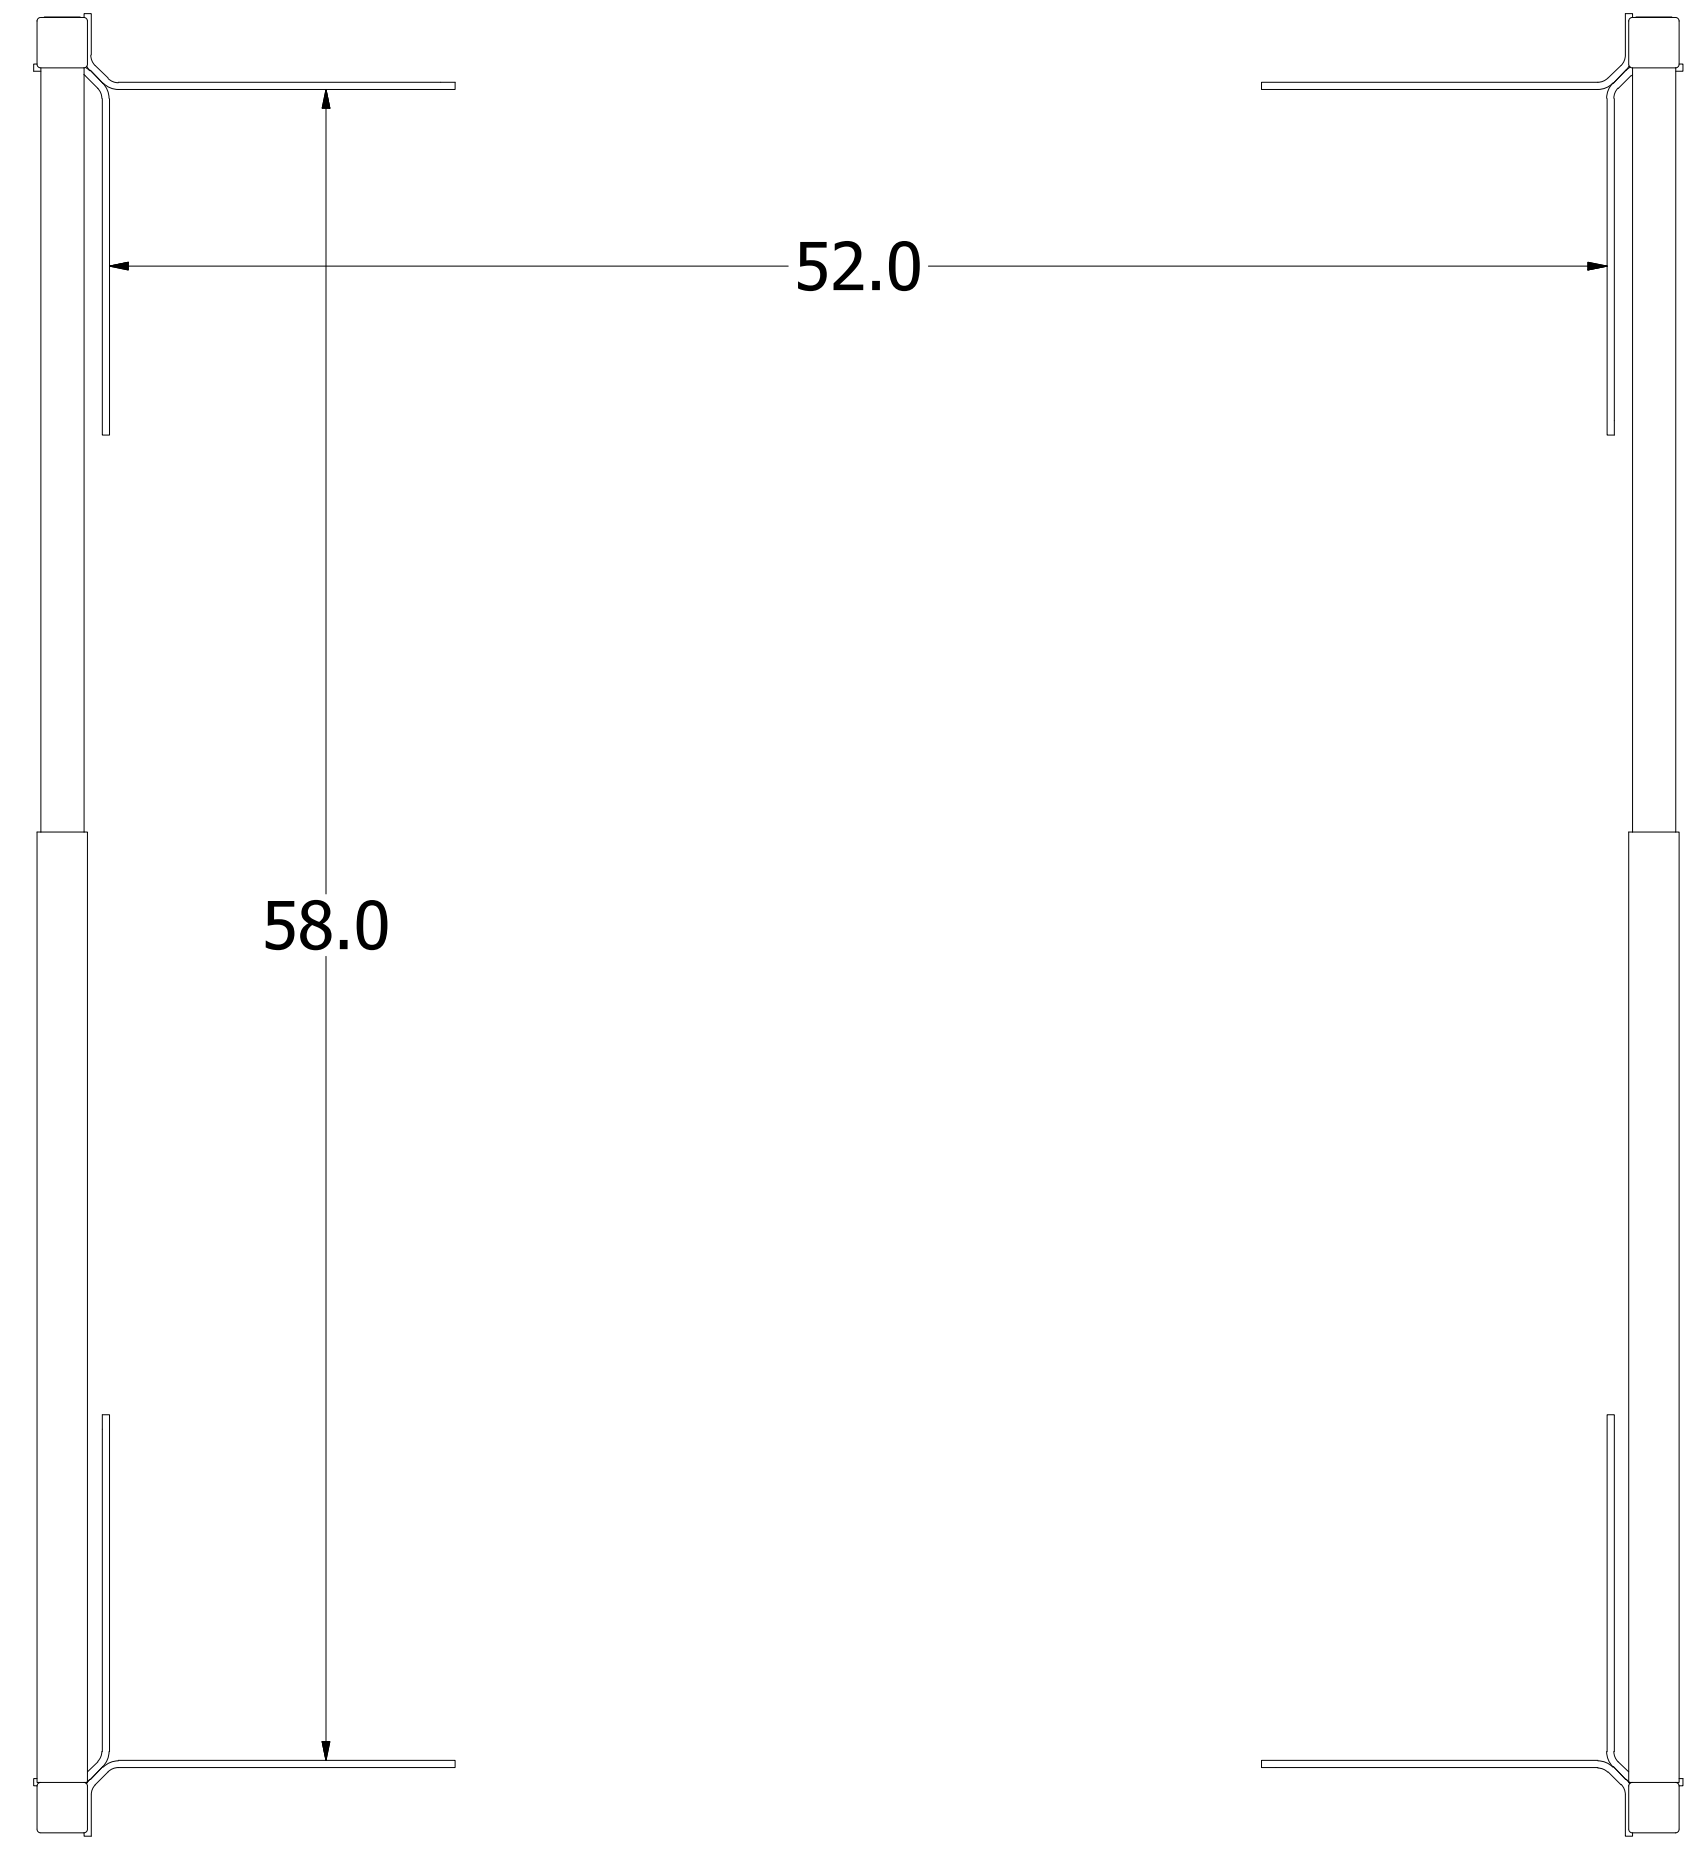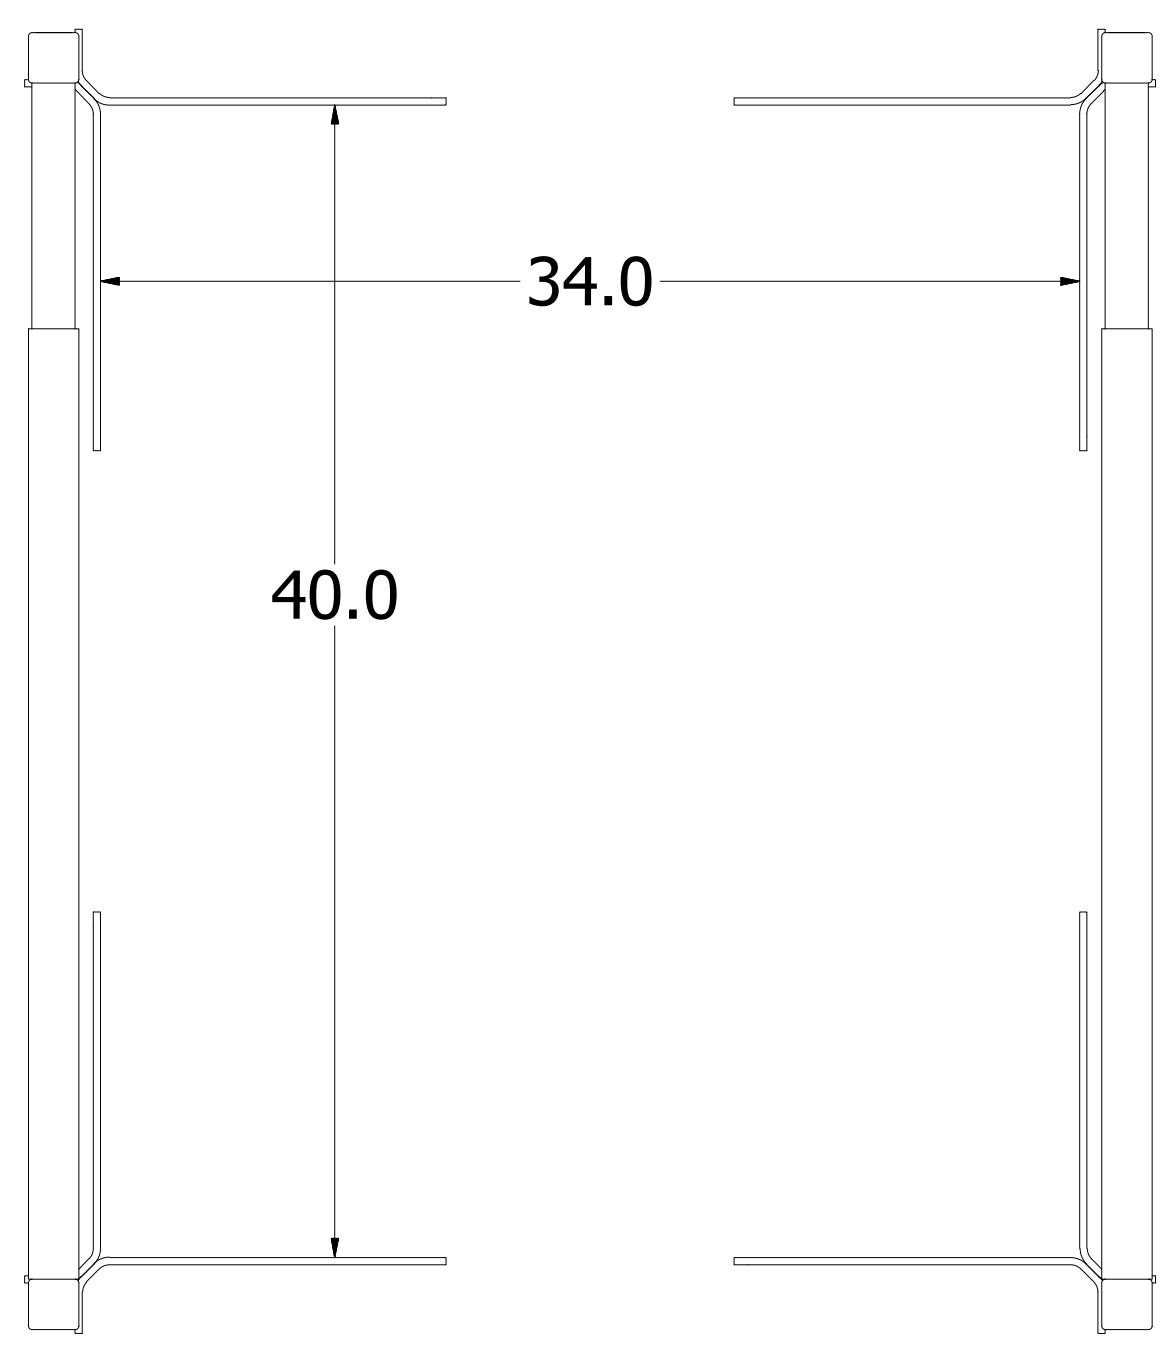

DRAWN	JCS	12/2/2020	Hart & Cooley Inc.	
CHECKED			5030 Corporate Exchange Blvd. SE Grand Rapids, MI. 49512 Ph: 800-624-8642	
QA			TITLE	
MFG			RETROFIT SAFETY RAIL	
APPROVED			SIZE	DWG NO
			D	MSTR-30-48
			SCALE	REV
				--
			SHEET 1 OF 1	