

MILCOR®



NEW!

MILCOR®

THERMAL PRO 24™

ROOF ACCESS HATCHES



Specifications

Material: 0.090 Aluminum Cover and Curb

Finish: Mill Finish Aluminum

Cover: Covers open easily to 68 deg for ladder access

sizes and 85 deg for stair access sizes.

Curb: 0.090 aluminum liner, 12" high curb, integral counterflashing, 4½" wide mounting flanges with pre-drilled hole, 3" polyisocyanurate insulation, with condensation liner and thermal breaks.

Gasket:

- · Extruded EPDM rubber gasket adhered to cover.
- Custom EPDM rubber curb gasket for thermal breaking curb.

Hinges: Zinc Plated Steel Pintle Hinges.

Lift Assist: Cover operation is assisted by enclosed heavy-duty gas spring.

Latches: Slam latch with interior and exterior handles and padlock hasp.


Hardware: All hardware is zinc plated.

Load Capacity: 70 psf

Thermal Resistance: Internal thermal breaking components and Patent Pending thermal impedance components, along with R-24 in insulation allows for extreme temperature change resistance.

Size	Aluminum Cover and Curb	
	Model No.	Part No.
3' 0" x 2' 6"	TP-1	3501-241-9
3' 0" x 3' 0"	TP-3X3	3501-242-9
4' 0" x 4' 0"	TP-4X4	3501-243-9
2' 6" x 4' 6"	TP-2	3501-244-9

Hart & Cooley, LLC 5030 Corporate Exchange Blvd. SE Grand Rapids, MI 49512

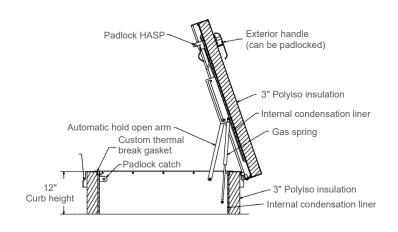

For more information, call (800) 624-8642 or visit milcorinc.com

